



SAFEFLUE
ORIELFLUE 


www.orielflues.com

INSTALLATION OF AN INSET STOVE
WITH THE RELINING OF AN
EXISTING CHIMNEY WITH FLEXI FLUE
AND SINGLE WALL FLUE

CHIMNEY HAT FOR
FLEXI FLUE

CLAMP COLLAR FOR
FLEXI FLUE

FLEXI FLUE LINER



VERMICULITE INSULATION
AROUND FLEXI FLUE

CLOSURE PLATE FOR FLEXI
FLUE LINED CHIMNEY

45° SINGLE WALL TEE




DOUBLE INSULATED SOOT DOOR

WALL SLEEVE WITH NON COMBUSTIBLE
FIREROPE SEAL

VITREOUS ENAMEL 45° BEND WITH
CLEANING DOOR

VITREOUS ENAMEL STRAIGHT PIPE

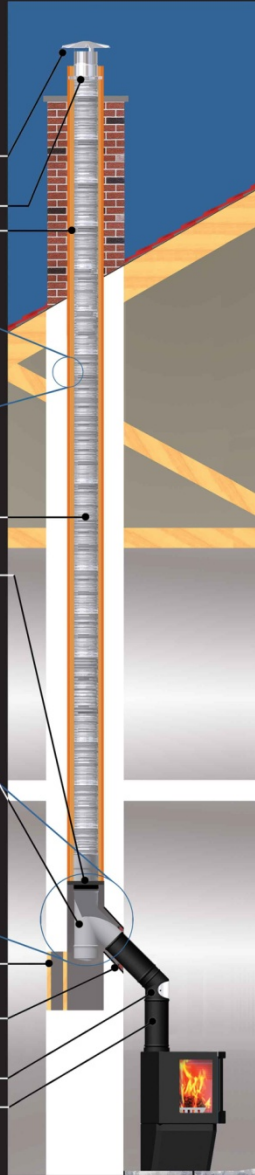

SAFEFLUE
ORIELFLUE 



Oriel Flue Products are Tested to BS EN 155-1 & BS EN 155-2 and are CE approved. All Flue systems must be installed, by competent and qualified technicians. All appliances should be installed in compliance with the manufacturer's instructions. All installations should always comply with the current revision of Section J of the department of the Environment, Heritage and Local Governments Building Regulations. Oriel Flues do not accept responsibility for damages as a result of inadequate installation practices or in cases where the flue systems and appliances are not installed in accordance with the prerequisite standards. This document is the property of Oriel Flues Ltd. Do not reproduce all or copy without the express written consent of Oriel Flues Ltd.

© 2010 Oriel Flues Ltd.